

[without IPC]

Infinity® Industrial Display D2



TECHNICAL SPECIFICATIONS

TFT

- 17" color, optional Touchscreen (ELO Accu Touch via serial, opt. USB)
- Resolution: max. 1280 x 1024, 250 cd/m²
- Frequency: 30 - 61 KHz Horizontal, 55 - 76 Hz Vertical
- Display Area: HxV: 337.9 x 270.3 mm
- Pixel Pitch: WxH: 0.264 x 0.264 mm
- Contrast Ratio: 450:1
- Response Time: 16 msec.
- Viewing Angle: Horizontal 80°, Vertical 70°
- Input Voltage Range: +8 ~ +14 VDC
- High brightness with 4-CCFL backlight lamps
- DDC Version 2 and VESA DPMS compliance
- On Screen Display
- Power Management

Environment

Current consumption

- +8V / 3.0A (max.) at 1280x1024@75Hz
- +12V / 2.5A (max.) at 1280x1024@75Hz
- +14V / 2.0A (max.) at 1280x1024@75Hz

Temperature range

- Storage: -20° ~ 70°C
- Operating: 0° ~ 50°C
- Relative Humidity: 10% ~ 90%, non-condensing

Case

Case

- Solid, high-quality industrial case
- Aluminium, 2 mm thickness
- VESA screw thread (75x75 and 100x100)
- optionally for assembly in 19" rack

Front bezel

- 4 mm aluminium
- opt. with IP65 Protection (only assembly and Stand-Alone)
- powder-coated
- in your customer color available
- on request also with your corporate logo

Dimensions

- WxDxH:
 - 482 x 54 x 354 mm (19" rackmount)
 - 494 x 54 x 396 mm (assembly)
 - 449 x 54 x 339 mm (flush front, Stand-Alone)

Standard Analog interface

Power supply

- external 45 Watt power supply, 100-240 VAC
- 2 years Warranty, Burn-In, CE compliant

Custom configuration on request!

DSM[®]
Computer







19" Assembly



Stand-Alone
(VESA Swing Arm opt.)

Layout 96M9935

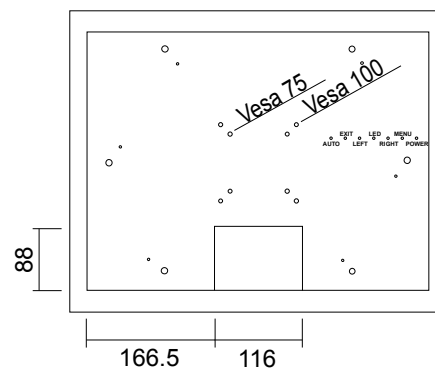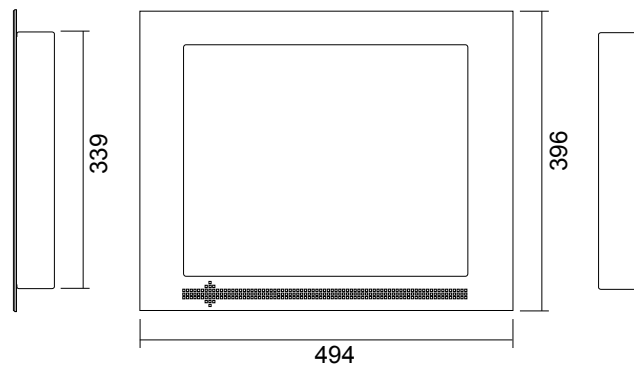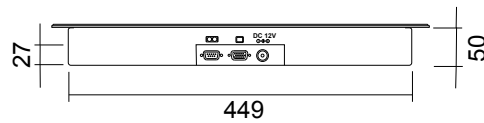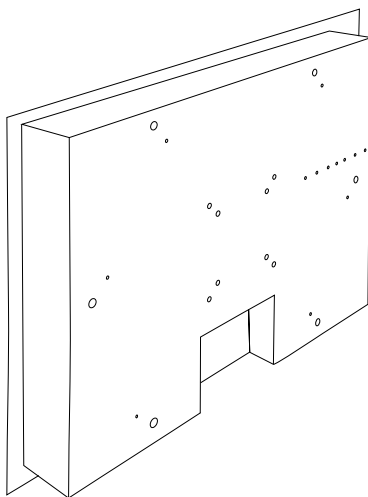

ORDER NUMBER

96M9935

- 17" TFT Display
- Resolution: max. 1280 x 1024, 250 cd/m²

Published: Dezember 2009. Subject to change without prior notice